

# **SHEHDS SHE-RCFP9130C**

## **LED PAR 9x10W+1x30W**



## **USER MANUAL**

## **Please carefully read the product description before use**

### **Maintenance**

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

### **Statement**

Hie product has well capability and intact packing when leave factory.All of the user should comply with above warning item and manual ,any misuse cause of the damages are not included in our guarantee.and also can't be responsible for any malfunction & problem owing to ignore the manual

Please forgive that we will not be notice for technical change

### **Attention Item**

1. For guarantee the life of product,please don't put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
4. Power supply should not be changed over +&-10% while the light is using,it will be decreased the life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.
5. After power off.if it is need used again,please cool down over 20 minuter.
6. Please look round the manual for ensure the product can be used normally.


### **DMX Channel Summary-7 Channels Mode**

<b>Channel</b>	<b>Value</b>	<b>Function</b>
1	Total dimming	R, G> B' W Total dimming, linear dimming, dark to light
2	R dimming	R Dimming, linear dimming, from dark to light
3	G dimming	G Dimming, linear dimming, from dark to light
4	B dimming	B Dimming, linear dimming, from dark to light
5	W dimming	W Dimming, linear dimming, from dark to light
6	Function selection	0—50: Strobe and linear dimming; 51—100: Jump; 101—150: Gradient; 151—200: Pulse variable, <u>201—255: Voice</u>
7	Function speed	Corresponding to the speed of the sixth channel function, from slow to fast

## Display Control Instruction

No	Display	Function
1	D001	Address code, (512 - 001) B, C key value addition and subtraction address code value
2	iron	Infrared. (OFF - B) ON, C key selector switch
3	P000	Colorful jump, (255 - 00) B, C key to modify the jump speed
4	L000	Colorful gradient, (255 - 00) B, C key repair speed gradient
5	E000	Colorful pulse change, (00 - 255) B, C key to modify the pulse speed
6	Soud	Colorful voice changes
7	R000	Red color selection. (255 - 000) C, B key to modify the brightness
8	G000	Green color selection, (255 - 000) C, B key to modify the brightness
9	B000	Blue color selection, (255 - 000) C, B key to modify the brightness
10	W000	White color selection, (255 - 000) C, B key to modify the ' brightness
11	F000	Strobe. (000 - 255) B. C key to modify the flicker frequency

## Infrared Function

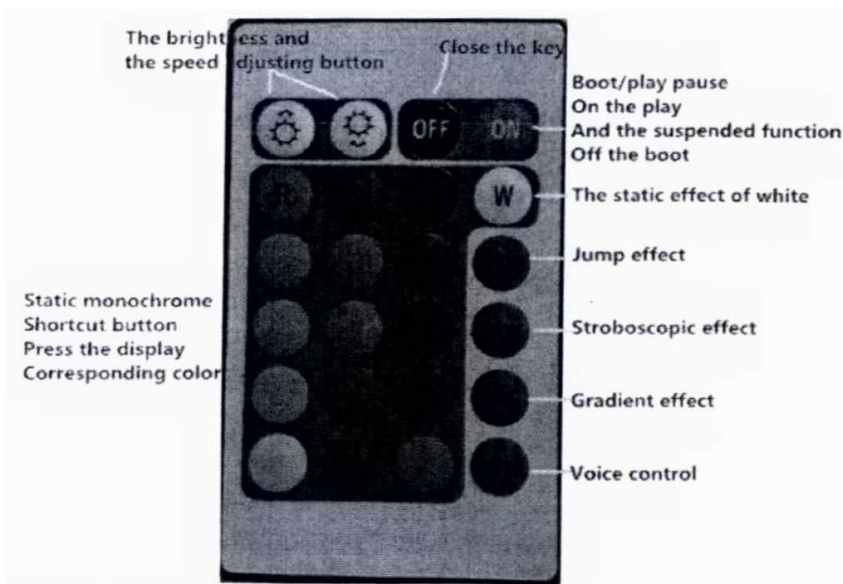

matters needing attention:


- 1) in a place as long as the infrared function to open a lamp, first open the infrared functionkeys (IR, ON)

Other lights are set to (IR OFF);

- 2) at the same time and can only choose a console IR (infrared control, operate in the host mode).

## Display Control Instruction

Welcome to use our LED Par RGB 9\*10W+1 xJOW. The light uses energy-saving LED. long Product life. shockproof. dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects. easy to operate, suitable for all types of entertainment decoration. architectural lighting industry.

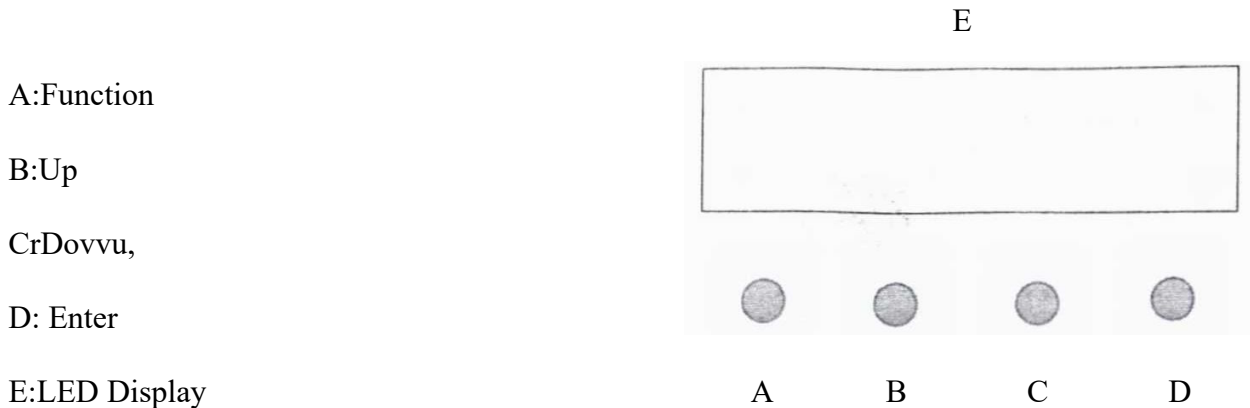

Instructions Press the function key A cycled out the eight different function effects. digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm

## Product Introduction

- \* Power Supply :AC90--275V,50--60HZ
- \* Power consumption: 120W
- \* Fixing lamp.LED Par RGB 9\* 10W+1 x30W
- \* DMX-Controll-channels:7 DMX Channels
- \* Shutter: Flash rate: 0--10HZ
- \* Dimmer:0-100% mechanic dimmer

◆Operational modes:DMX512,Auto Run.Sound action,Strobe,Stand Alone and Master/Slave,With Rich Advanced Built-in Programs.

- \* Beam Angle:25/35/40/45 degree
- \* Long Lifespan LEDs(more than 60.000 hours)
- \* Weight: 1.5 KG
- \* Product size:20.5x20.5x8 cm